

KMTC

Selfridge Angb Mount Clemens, MI

2.00 mi NE of city N42 36.8336' W82 50.2146' Mag Var: 06W

Nav aids:

Type:	ID:	Morse:	Frequency:	Radial:	Distance:
VOT	DET	.. . -	111.6	032	15 nm
DME	PSI	.. - .	111.0	099	31 nm
VOT	DTW	.. - .	109.8	045	33 nm

Traffic Patterns (FAA):

Ovhd Tfc Pat 2500'
Trans VFR Jet Acft not Authority Rect Tfc Pat
Right: 01,19

Runways:

Name:	Dimensions:	Material:	Condition:	Treatment:
01/19	9000X150	pem	not reported	no treatment

Tower:

Mil Ops Hrs: 1230-0400Z++ DAILY; CLSD HOLs
Primary Approach Control Hrs: 1200-0400Z++
Primary Depart. Control Hrs: 1200-0400Z++
Secondary Approach Control Hrs: 0400-1200Z++
Secondary Depart. Control Hrs: 0400-1200Z++
Tower Hrs: 1230-0400Z++, CLSD HOL. OT UNCONTROLLED FOR DHS, ARNG, USCG OR
EMERGENCY OPS.
Elev: 581.2 Ft
Freq Avbl On Request.

Lighting:


Actvt Hirl, Reil, PAPI Ry 01/19, Sals Ry 01, Alsf Ry 19 - 120.15.

Fuel: Jet B +Icing Inhibitor

Communication Freqs:

119.6 App/Dep
132.35 SAT
125.325 ATIS
119.6 BARI DP
119.6 BASIC RADAR
119.6 CCOBB DP
128.3 Clearance Delivery
119.6 CLVIN DP
121.5 Emergency
119.6 GGIBY DP
128.3 Ground Control
119.6 HHOWE DP
119.6 KAYLN DP
119.6 LIDDS DP
123.1 MEDEVAC
119.6 MIGGY DP
119.6 PAVYL DP
119.6 SNDRS DP
120.15 Tower
119.6 ZETTR DP

Elevation: 580 ft (176.8 m)

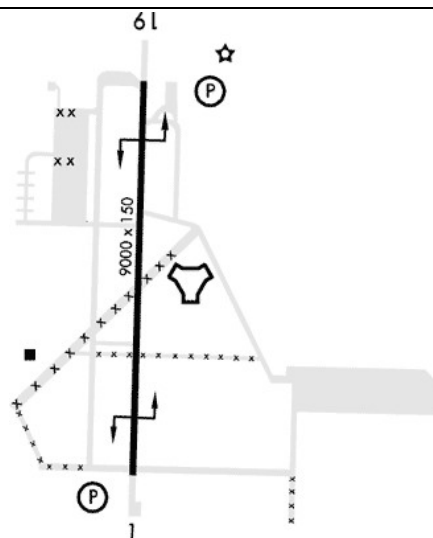

Charts: NACO: Detroit Sectional

Phone: 586-239-4115

Notes:

RESTRICTED. MILITARY AIRPORT. PRIOR PERMISSION REQUIRED. CONTACT BASE OPS
MANAGER 586/307-XXXX
Year-round, 7 Days a Week, 1230-0400Z++
A++ Fuel Avbl 1200-0300Z++ Mon-Fri 1430-2100Z++ Sat-Sun, Clsd Hol.
Bearing Strength; Ry 01-19; St 175.
Caution: Moderate Bird Act Common.
Caution: Rwycc not Rpt.
Fighter Rectangular & Clsd Traffic Pattern is 2200 Ft; All Others Tps 1700 Ft. Jasu
1(M32A-60); 1(A/M32-86D) 1(Mc-11).
Fluid: Sp Presair Lpox Lox Hpox.
Haz Cargo Pad Can Accom C-130, Day Only & Ltd C-17 Use. No Tie Down, Nor Long
Term Parking on Pad.
Misc: Std USAF Rsrs Applied. Class D Airspace Cont.
Misc: Ry 01-19 Transversely Grooved. Ry 01-19 S 1500' Concrete, Cntr 5700' Asphalt, N
1800' Concrete. Ry 01-19 S Ovrn Hardened May be Used for Tkof, Day VFR Only.
Misc: Snow Removal Accomplished 1215-2100Z++ Wkd.
Misc: Tran Acft Req Use of Selfridge Angb Drop Zone (Dzs).
Misc: Vip Acft CTC Pts 30 Min Prior to Arr with Firm Chock Time. Base Operations Dsn
273-5322, C586-239-5322, Fax Dsn 273-5814, C586-239-5814, Notam Dsn 273-4069
C586-239-4069.
Noise Abtmt; See Flip Ap/1 Airport Rmk.
Oil; O-128-133-148 (Soap 1215-2115++ Mon Fri, Ot Dsn 273-5777.)
Ppr All Acft, Dsn 273-5322/4402.
Rmk-Caution: East Ramp Wind Cone Unlgtd, Daytime Use Only.
Snow Removal 1215-2100Z++ Mon Thru Fri.
Tran Alert; Opr 1230-0130Z++. Tran Alert & Fuels Clsd Hol.
Wx Briefing Avbl 1115-0315Z++, 1115-2015Z++ Hols.
500' Asphalt Overrun Each End Rwy 01-19.
S 1500 Ft Conc, Cntr 5700 Ft Asph, N 1800 Ft Con.

16315


AIRPORT DIAGRAM

AFD-276 [USAF]

SELRIDGE ANGB (KMTC)

MT. CLEMENS, MICHIGAN

ATIS 125.325 270.1
SELRIDGE TOWER ★
120.15 225.4
GND CON
128.3 275.8
CLNC DEL
128.3 275.8

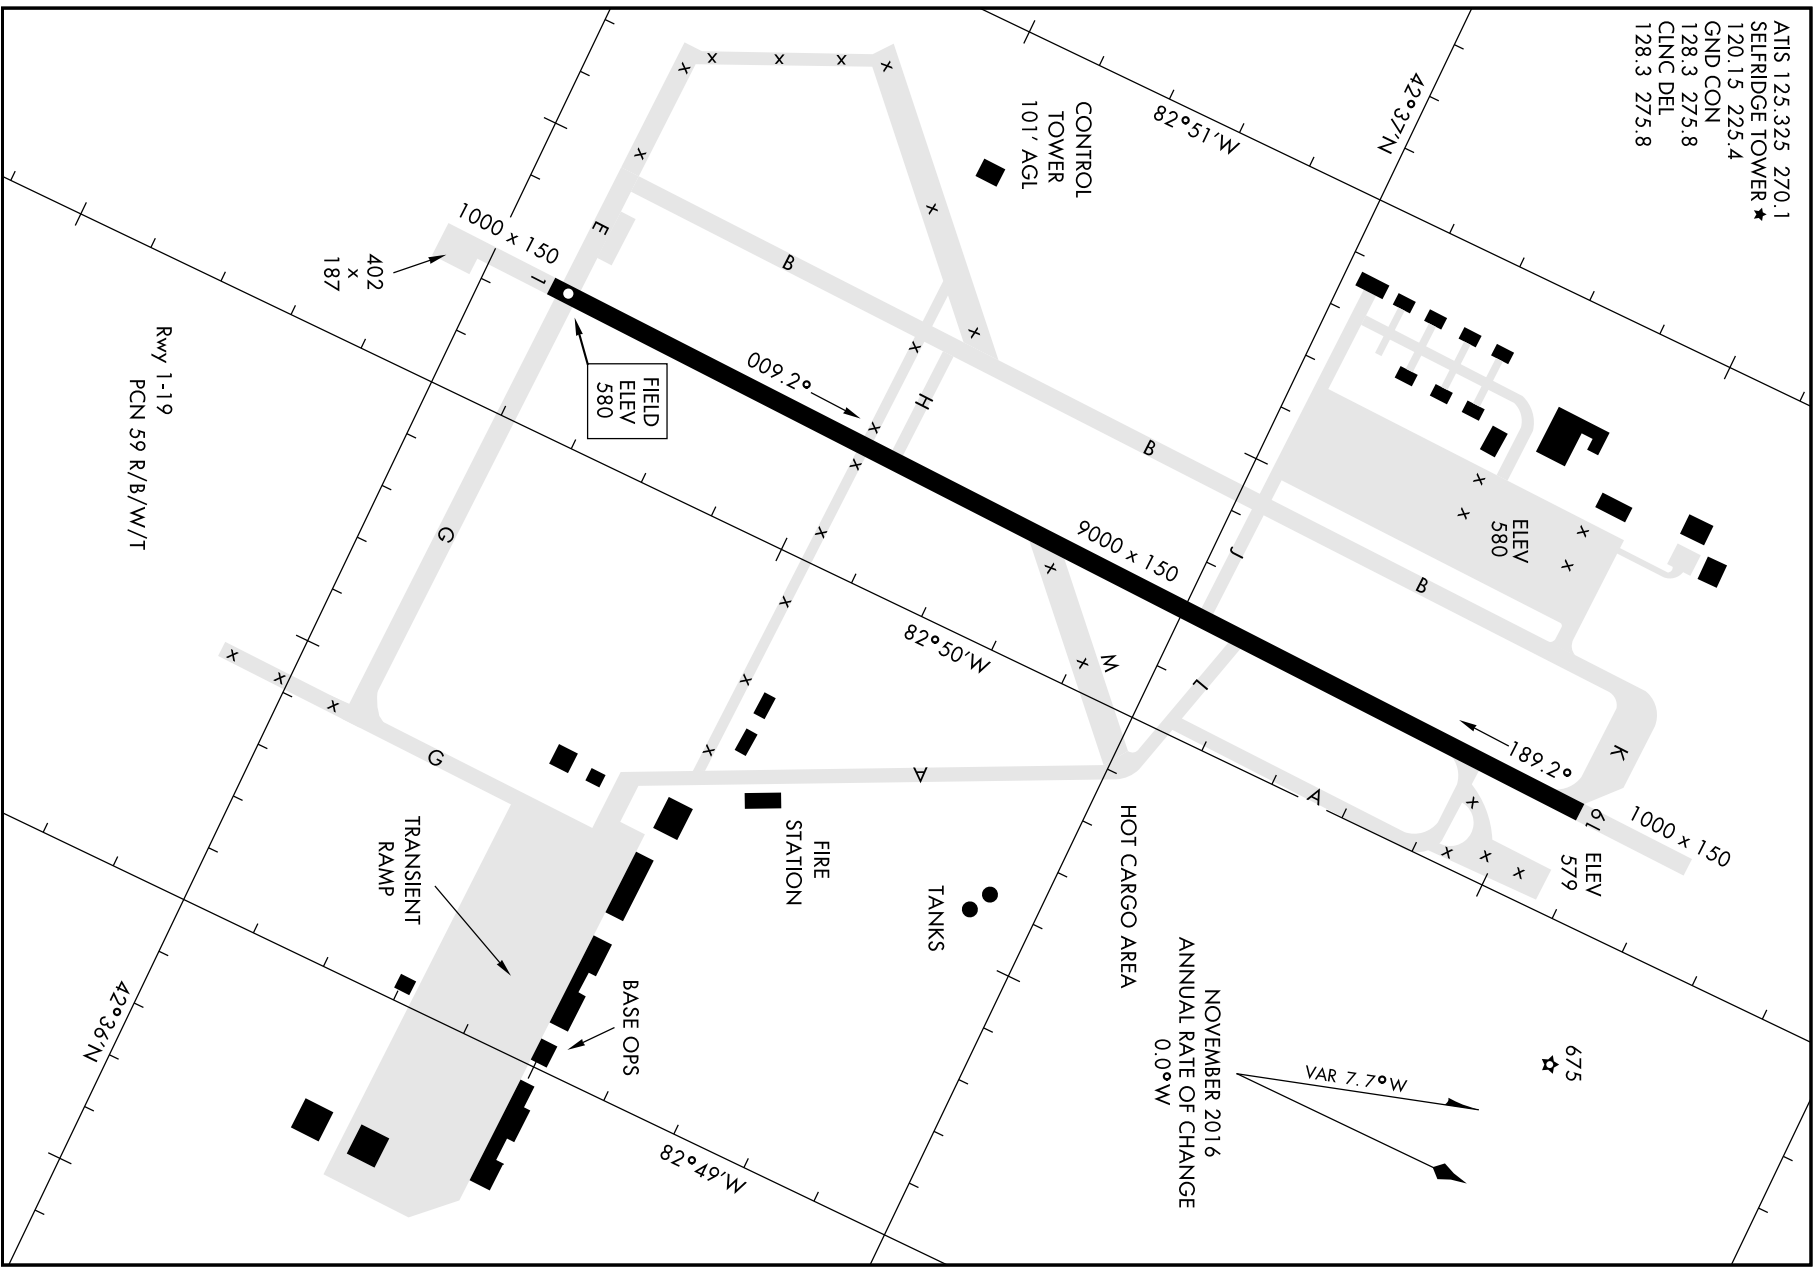

EC-1, 20 MAY 2021 to 17 JUN 2021

EC-1, 20 MAY 2021 to 17 JUN 2021

AIRPORT DIAGRAM

MT. CLEMENS, MICHIGAN
SELRIDGE ANGB (KMTC)